



VARIOUS PATTERNS AVAILABLE THIS AREA
SEE BROCHURE

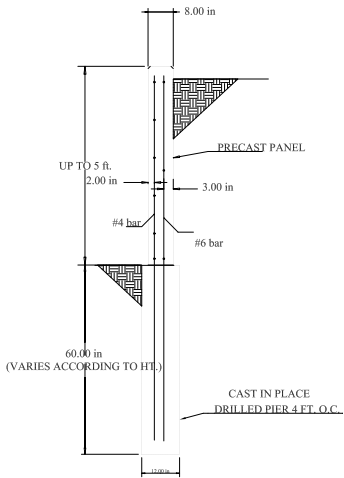

SECTION

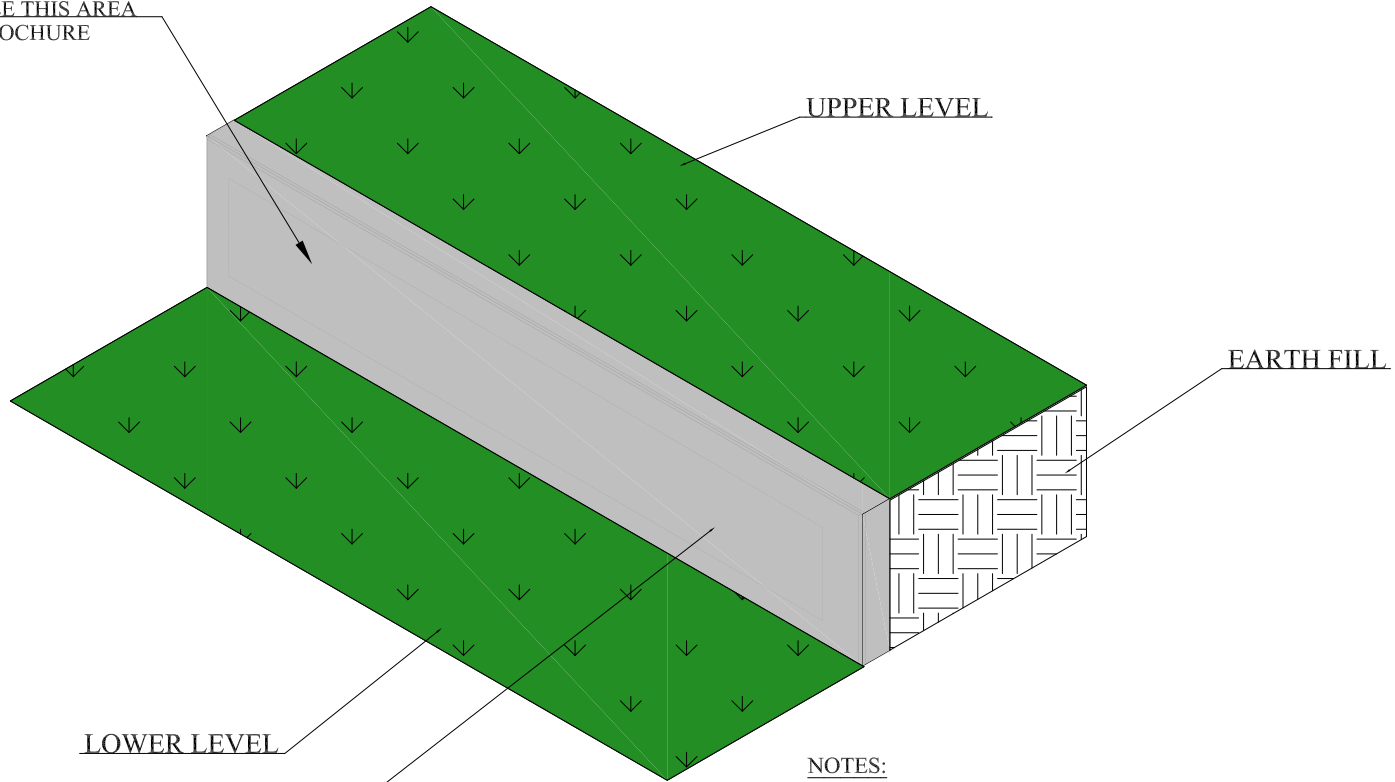

UPPER LEVEL

LOWER LEVEL

RETAINING PANEL

EARTH FILL

DRILLED PIERS TYP.



TONGUE & GROOVE JT

TOP VIEW

NOTES:

1. ALL POURED IN PLACE CONCRETE TO BE 2500 PSI.
2. ALL #4 & LARGER REBAR TO BE GRADE 60.
3. 5 FT. MAX GRADE DIFFERENTIAL BET. WALL SIDES.
4. ALL WORK TO CONFORM TO UBC & LOCAL CODES.
5. USE SIMPSON PGT2 TO ATTACH WOOD FENCE DESIGNED BY OTHERS.
6. WOOD FENCE MAY BE INCLUDED UP TO 4 FT. WALL HEIGHT.
7. 2 1/2" ID PVC SOCKETS TO BE CAST INTO PANELS ON 6' CTRS. TO ACCEPT 2 1/2" O.D. GALV. PIPE TUBING WHERE REQUIRED FOR WOOD FENCE.

DWG

RET
2

DATE: FEB. 26, 2002

DYNAHOLD RETAINING SYSTEM

PRECAST RET. WALL DETAIL

DYNAMIC PRECAST

CO., INC.

5300 SEBASTOPOI RD., SANTA ROSA, CA 95407
PHONE: 707-573-1100, FAX: 707-573-1919